

MINI AIR ANGLE GRINDER



Composite
 No Gear
 100°
 Rear Exhaust
GP-824CGR



Grinder & Sander
GP-824GS

Specifications

Recommended Air Pressure 90 psi (6.3 kg/cm²)

Model	Wheel Size (mm)	Max.Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-824CGR	50	22,000	0.51	177	0.35	1/4"	6.5	75	< 2.5	20 pcs/1.1 cu-ft/G.W.: 12 kgs
GP-824GS	50	15,000	0.83	178	0.56	1/4"	6.5	87	< 2.5	12 pcs/0.8 cu-ft/G.W.: 12 kgs

AIR DIE GRINDER



GP-824F1



GP-824F



Grip Lever
 Side Exhaust
GP-824JS



Side Exhaust
GP-824JH



Composite
GP-824LG



Composite
 Rear Exhaust
GP-824LGR



GP-824



GP-824T



GP-824ST
GP-824ST1



Rear Exhaust
GP-824B



Rear Exhaust
GP-824R



Rear Exhaust
GP-824R1



GP-824JAS



Rear Exhaust
GP-824JCS

Specifications

Recommended Air Pressure 90 psi (6.3 kg/cm²)

Model	Collet Size (inch)	Max.Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-824F1	1/4"(6 mm)	3,500	0.89	218	0.56	1/4"-PT	6.5	86	< 2.5	20 pcs/1.16 cu-ft/G.W.: 20.5 kgs
GP-824F	1/4"(6 mm)	22,000	0.71	177	0.56	1/4"-PT	6.5	86	< 2.5	20 pcs/0.64 cu-ft/G.W.: 16.5 kgs
GP-824	1/4"(6 mm)	22,000	0.70	168	0.51	1/4"	5	90	< 2.5	20 pcs/0.65 cu-ft/G.W.: 15.5 kgs
GP-824T	1/4"(6 mm)	25,000	0.46	152	0.63	1/4"	5	87	< 2.5	20 pcs/0.73 cu-ft/G.W.: 11.0 kgs
GP-824ST	1/4"(6 mm)	22,000	0.60	178	0.61	1/4"	5	86	< 2.5	12 pcs/0.8 cu-ft/G.W.: 10 kgs
GP-824ST1	1/4"(6 mm)	25,000	0.40	155	0.42	1/4"	5	86	< 2.5	12 pcs/0.8 cu-ft/G.W.: 8.7 kgs
GP-824B	1/4"(6 mm)	25,000	0.90	130	0.42	1/4"	5	84	< 2.5	10 pcs/1.3 cu-ft/G.W.: 11 kgs
GP-824R	1/4"(6 mm)	20,000	0.42	155	0.65	1/4"	5	93	< 2.5	20 pcs/0.6 cu-ft/G.W.: 10 kgs
GP-824R1	1/4" (6 mm)	22,000	0.26	150	0.70	1/4"	5	92	< 2.5	20 pcs/0.7 cu-ft/G.W.: 16 kgs
GP-824JAS	1/4"(6 mm)	20,000	0.55	170	0.42	1/4"	5	84	< 2.5	20 pcs/0.6 cu-ft/G.W.: 14 kgs
GP-824JCS	1/4"(6 mm)	17,000	0.78	170	0.35	1/4"	5	84	< 2.5	10 pcs/1.3 cu-ft/G.W.: 11 kgs
GP-824JS	1/4"(6 mm)	20,000	0.70	175	0.49	1/4"	5	85	< 2.5	20 pcs/1.1 cu-ft/G.W.: 19 kgs
GP-824JH	1/4"(6 mm)	20,000	0.70	165	0.49	1/4"	5	85	< 2.5	20 pcs/1.1 cu-ft/G.W.: 19 kgs
GP-824LG	1/4"(6 mm)	20,000	0.40	150	0.42	1/4"	5	80	< 2.5	20 pcs/0.5 cu-ft/G.W.: 11 kgs
GP-824LGR	1/4"(6 mm)	20,000	0.40	150	0.42	1/4"	5	73	< 2.5	20 pcs/0.5 cu-ft/G.W.: 11 kgs

AIR EXTENSION DIE GRINDER



GP-824EA



GP-824EC



GP-824ED




GP-824STE
GP-824STE1



GP-824EF



Side Exhaust
GP-824L1

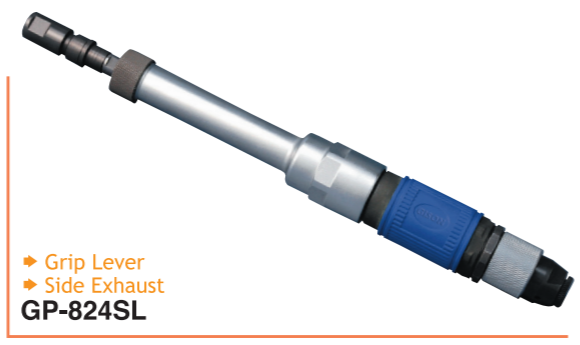

Grip Lever
Side Exhaust
GP-824SL

Specifications

Model	Collet Size (inch)	Max.Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-824EA	1/4"(6 mm)	20,000	1.15	333	0.49	1/4"	5	99	< 2.5	16 pcs/0.75 cu-ft/G.W.: 23.5 kgs
GP-824EC	1/4"(6 mm)	22,000	1.05	319	0.56	1/4"	5	86	< 2.5	20 pcs/1.1 cu-ft/G.W.: 23 kgs
GP-824ED	1/4"(6 mm)	24,000	0.65	248	0.42	1/4"	5	99	< 2.5	20 pcs/0.85 cu-ft/G.W.: 15 kgs
GP-824STE	1/4"(6 mm)	22,000	0.80	280	0.56	1/4"	5	85	< 2.5	12 pcs/1.1 cu-ft/G.W.: 13 kgs
GP-824STE1	1/4"(6 mm)	22,000	0.70	240	0.50	1/4"	5	85	< 2.5	12 pcs/1.1 cu-ft/G.W.: 13 kgs
GP-824EF	6 mm or 8 mm	13,500	1.74	378	0.59	1/4"	6.5	86	< 2.5	10 pcs/0.90 cu-ft/G.W.: 20.5 kgs
GP-824L1	1/4"(6 mm)	18,000	1.10	320	0.45	1/4"	5	89	< 2.5	20 pcs/1.7 cu-ft/G.W.: 28 kgs
GP-824SL	1/4"(6 mm)	18,000	1.10	320	0.45	1/4"	5	89	< 2.5	20 pcs/1.7 cu-ft/G.W.: 28 kgs

Recommended Air Pressure 90 psi (6.3 kg/cm²)

AIR ANGLE DIE GRINDER



GP-824LGA



110°
GP-824M



GP-824STA
GP-824STA1



115°
GP-824STA2



GP-824TA



No Gear
Rear Exhaust
GP-824RA



110°
No Gear
Rear Exhaust
GP-824CA



Composite
100°
No Gear
Rear Exhaust
GP-824MR

Specifications

Model	Collet Size (inch)	Max.Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-824LGA	1/4"(6 mm)	18,000	0.65	155	0.42	1/4"	5	95	< 2.5	20 pcs/0.95 cu-ft/G.W.: 14.5 kgs
GP-824M	1/4"(6 mm)	16,000	0.66	170	0.42	1/4"	5	96	< 2.5	20 pcs/0.95 cu-ft/G.W.: 15.5 kgs
GP-824STA	1/4"(6 mm)	18,000	0.70	178	0.56	1/4"	5	87	< 2.5	12 pcs/0.80 cu-ft/G.W.: 12 kgs
GP-824STA1	1/4"(6 mm)	20,000	0.50	155	0.42	1/4"	5	87	< 2.5	12 pcs/0.80 cu-ft/G.W.: 9.6 kgs
GP-824STA2	1/4"(6 mm)	18,000	0.70	178	0.49	1/4"	5	86	< 2.5	12 pcs/0.80 cu-ft/G.W.: 11.8 kgs
GP-824TA	1/4"(6 mm)	20,000	0.62	154	0.51	1/4"	5	94	< 2.5	20 pcs/0.73 cu-ft/G.W.: 14 kgs
GP-824RA	1/4"(6 mm)	22,000	0.34	155	0.70	1/4"	5	90	< 2.5	20 pcs/0.80 cu-ft/G.W.: 9.0 kgs
GP-824CA	1/4"(6 mm)	25,000	0.70	142	0.35	1/4"	5	85	< 2.5	10 pcs/1.4 cu-ft/G.W.: 9.0 kgs
GP-824MR	1/4"(6 mm)	22,000	0.55	170	0.49	1/4"	5	80	< 2.5	20 pcs/1.1 cu-ft/G.W.: 12 kgs

Recommended Air Pressure 90 psi (6.3 kg/cm²)

MICRO AIR GRINDER



GP-8241



5 Bearing for less vibration
GP-8244J



GP-8240D



GP-8240



GP-8243



GP-8242



GP-8242A



GP-8245C



Industrial Type
GP-8246C

AIR DIE GRINDER KITS



GP-824K



GP-824STK



GP-824STAK

MICRO AIR GRINDER KITS



GP-8240K / GP-8243K



GP-8245CK / GP-8246CK



GP-8244L

Specifications										Recommended Air Pressure 90 psi (6.3 kg/cm ²)
Model	Collet Size (inch)	Max.Speed (rpm)	Net Weight (kgs)	Length (mm)	Air Cons. (m ³ /min)	Air Inlet (inch)	Hose Size (mm)	Sound Pressure (dBA)	Vibration (m/sec ²)	Packing
GP-8241	--	22,000	0.54	136	0.21	1/4"	5	83	< 2.5	20 pcs/1.9 cu-ft/G.W.: 12.0 kgs
GP-8244J	6 mm / 3 mm	30,000	0.54	255	0.39	1/4"	5	84	< 2.5	25 pcs/0.96 cu-ft/G.W.: 16 kgs
GP-8240D	1/8"(3 mm)	35,000	0.50	175	0.34	1/4"	5	82	< 2.5	20 pcs/0.9 cu-ft/G.W.: 11 kgs
GP-8240	1/8"(3 mm)	54,000	0.23	132	0.23	1/4"	5	84	< 2.5	20 pcs/1.25 cu-ft/G.W.: 15 kgs
GP-8243	1/8"(3 mm)	60,000	0.23	132	0.21	1/4"	5	82	< 2.5	20 pcs/1.25 cu-ft/G.W.: 15 kgs
GP-8242	1/8"(3 mm)	70,000	0.23	132	0.21	1/4"	5	80	< 2.5	20 pcs/1.25 cu-ft/G.W.: 15 kgs
GP-8242A	1/8"(3 mm)	60,000	0.48	140	0.14	1/4"	5	80	< 2.5	10 pcs/1.3 cu-ft/G.W.: 6.5 kgs
GP-8245C	1/8"(3 mm)	60,000	0.30	135	0.21	1/4"	5	84	< 2.5	20 pcs/1.3 cu-ft/G.W.: 16 kgs
GP-8246C	1/8"(3 mm)	60,000	0.35	135	0.23	1/4"	5	85	< 2.5	20 pcs/1.3 cu-ft/G.W.: 16 kgs

GP-824K		GP-824STK		GP-824STAK	
1 pc	1/4" (6 mm) Air Die Drinder (GP-824)	1 pc	1/4" (6 mm) Air Die Grinder (GP-824ST)	1 pc	1/4" (6 mm) Air Die Drinder (GP-824STA)
1 pc	1/8" (3 mm) Collet	1 pc	1/8" (3 mm) Collet	1 pc	1/8" (3 mm) Collet
5 pcs	1/4" (6 mm) Shank Stone	5 pcs	1/4" (6 mm) Shank Stone	5 pcs	1/4" (6 mm) Shank Stone
5 pcs	1/8" (3 mm) Shank Stone	5 pcs	1/8" (3 mm) Shank Stone	5 pcs	1/8" (3 mm) Shank Stone
1 pc	Nipple	1 pc	Nipple	5 pcs	2" Roloc Scotch Discs
2 pcs	Key Wrench	2 pcs	Key Wrench	5 pcs	3" Roloc Scotch Discs
1 pc	Plastic Box	1 pc	Plastic Box	1 pc	Nipple
Packing 10 sets/1.20 cu-ft/G.W.: 15 kgs		Packing 10 sets/1.20 cu-ft/G.W.: 13 kgs		Packing 10 sets/1.80 cu-ft/G.W.: 18.6 kgs	

GP-8240K / GP8243K		GP-8245CK / GP-8246CK		GP-8244L	
1pc	Micro Air Grinder (GP-8240 or GP-8243)	1pc	Micro Air Grinder (GP-8245C or GP-8246C)	1pc	30,000 rpm Micro Air Grinder (GP-8244J)
10 pcs	1/8" (3 mm) Shank Stone	10 pcs	1/8" (3 mm) Shank Stone	1 pcs	6 mm Shank Stone
1pc	Mini Oiler	1pc	Mini Oiler	1 pcs	3 mm Shank Stone
1pc	Oil Pot	1pc	Oil Pot	1pc	6 mm Collet
2 pcs	Key Wrench	2 pcs	Key Wrench	1pc	3 mm Collet
1pc	Plastic Box	1pc	Plastic Box	1pc	fixed shelves for 7" - 9" Stand Collet
Packing 20 sets/2.0 cu-ft/G.W.: 18 kgs		Packing 20 sets/2.5 cu-ft/G.W.: 16 kgs		Packing 6 sets/0.97 cu-ft/G.W.: 18 kgs	